

America's Choice Since 1964

750 PREMIUM DOOR



The Windsor 750w has 2" thick 24 Gage durable steel sections that are designed to provide years of dependable service. This door features an optional full thickness CFC-FREE laid-in-place polystyrene foam insulation with a 6.0 R-Value. With four panel designs, eight color choices, optional insulation, and many different decorative window selections, the 750w offers both beauty and value.

WINDSOR 750 Features

Strong by Design

End and center stiles are constructed with galvanized steel, providing superior strength and resistance to rust corrosion.

Protection from the Elements

Tongue and groove joint construction seals and aligns the sections providing a snug, weather-tight fit.

Sturdy Tog-L-Loc[™]

This sturdy fastening system ensures leak-proof and rust-proof joints adding years to the life of the door.

Keep the Outdoors Outside

The bulb-type vinyl bottom weather seal fits tight against the floor sealing out moisture, light, and energy leaks.

Smooth Operation


Galvanized steel hinges and selflubricating rollers are designed for long life and smooth, quiet operation.

Beat the Hot and Cold

An optional CFC-FREE laid-in-place polystyrene foam insulation is bonded to a white vinyl interior to provide a 6.0 R-Value.




DOOR PANELS

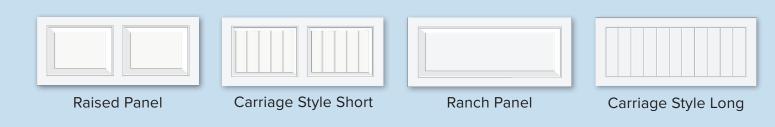


WINDOW INSERTS


Standard Panels

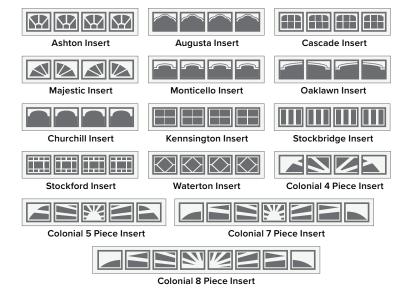

Ranch Panels

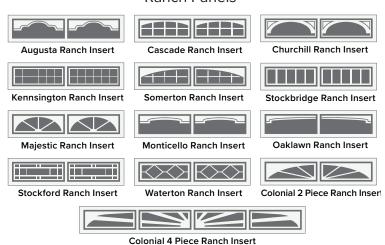

FINISH Actual color may vary

















Almond









Slate Gray

Optional decorative handles

and strap hinges give the look of forged iron.







5800 Scott Hamilton Drive, Little Rock, AR 72209 Tel 501.562.1872 • Fax 1.800.635.3667

For more information visit windsordoor.com





